

PRODUCT DATA SHEET



Frameseal bead with protecting lip

10 mm

Item no. 3712



Status: 01.08.2026 | 00:30

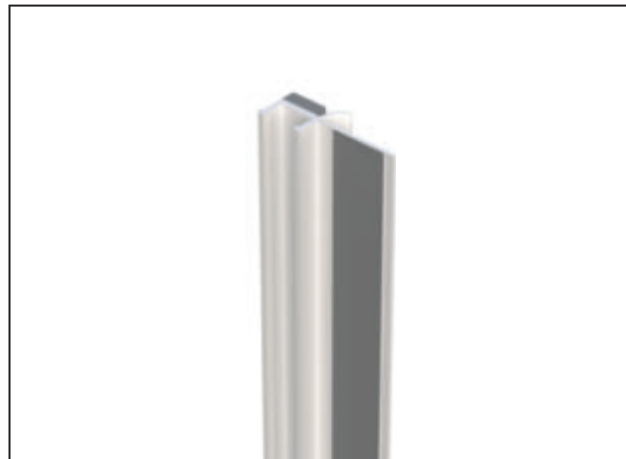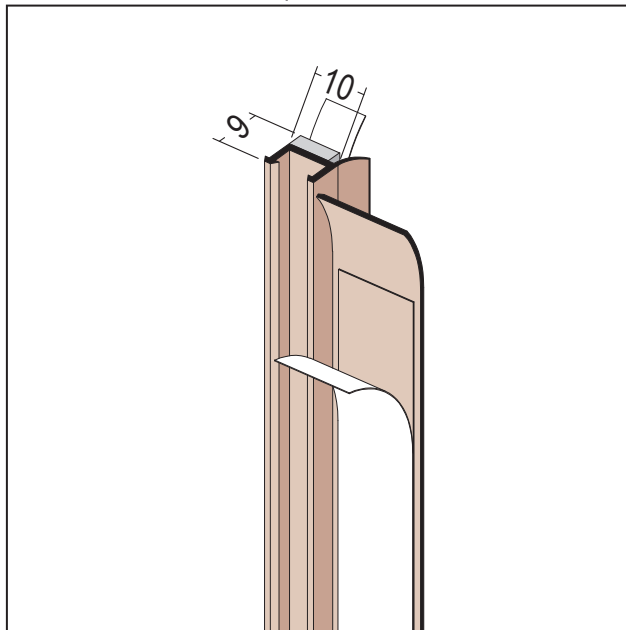

Designation	Frameseal bead with protecting lip 10 mm
Description	The self-adhesive PROTEKTOR PVC plastering strip with protective lip and tear-off adhesive tab for foil covering is suitable for creating visually and technically flawless connections between windows, doors and other components and plaster. Profile width 10 mm for interior and exterior plaster.
Product area	Interior plaster Exterior plaster
Product category	Soffit profiles
Plaster thickness	10 mm
Product width	10 mm
Air and component temperature	+5° bis +40°C
	3 mm
	8 mm
Appearance	Self-adhesive, closed-cell foam tape.
Underground	Adhesive areas must be flat, dry (note possible condensation), free of frost, dust and grease, and firm and stable. An adhesive test will determine whether the substrate is suitable for adhesion or whether special measures (e.g. cleaning) are required.
Treatment	Maximum installation length of 260 cm due to possible linear expansion. For underground with lightness value greater than 20.
Storage	Store profiles in a dry, frost-free place, lying flat and horizontally in the box. Do not store or transport profiles in a twisted or bent position. Protect boxes and/or profiles from excessive heat and direct sunlight. To remove the profiles, open the box along its entire length.
Impermeability to driving rain	bis 1050 Pa
Movement according to ÖNORM B6400/ÖAP VAR VII	Klasse IC
product line	Standard
Test report	Tested air, wind and driving rain tightness, tested movement absorption. The current test reports are available for download at www.protektor.de .

PRODUCT DATA SHEET

Frameseal bead with protecting lip

10 mm

Item no. 3712



Leaflet

* Leaflet * Fiche technique Formation de détails avec des profilés et des bandes d'étanchéité de joints pour l'enduit extérieur et l'ETICS, éditeur Verband für Dämmsysteme, Putz und Mörtel e.V. (VDPM).

* Guideline for connections to windows and shutters in plaster, thermal insulation composite system and dry construction, published by the Baden-Württemberg Association of Plasterers for Interiors and Facades (SAF).

Customs tariff number

39162000

Opened label

Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Colour	Packaging unit
115834	150.00	10 mm	Rigid PVC with soft PVC	10 - white	60 PCS / 36 BOX
115836	230.00	10 mm	Rigid PVC with soft PVC	10 - white	60 PCS / 36 BOX
115284	260.00	10 mm	Rigid PVC with soft PVC	10 - white	60 PCS / 36 BOX
115840	300.00	10 mm	Rigid PVC with soft PVC	10 - white	60 PCS / 36 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!