

PRODUCT DATA SHEET



Frameseal bead with protecting lip

10 mm

Item no. 3712



Status: 04.02.2025 | 11:02

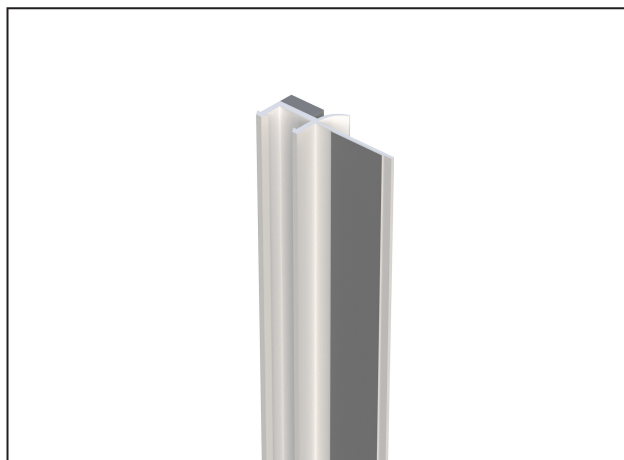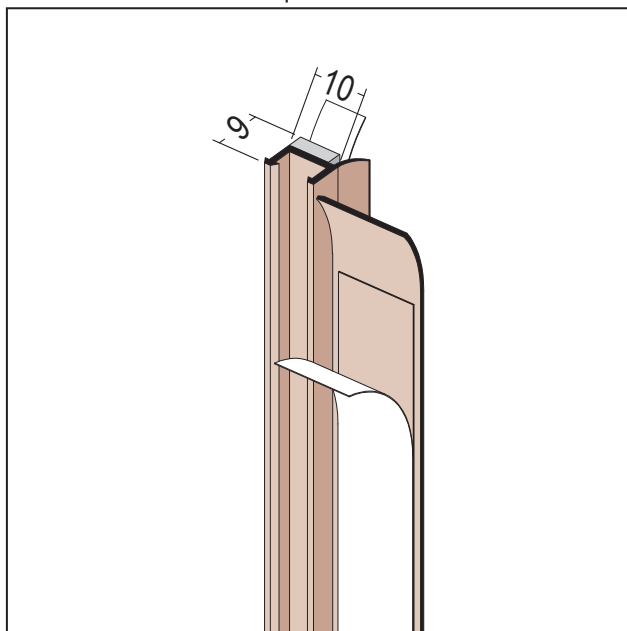

Designation	Frameseal bead with protecting lip 10 mm
Description	The self-adhesive PROTEKTOR plastering strip made of PVC with protective lip and tear-off adhesive tab for foil covering is suitable for creating visually and technically flawless connections of windows, doors and other components to plaster. Profile width 10 mm for interior and exterior plaster.
Product area	Internal plastering External rendering
Product category	Soffit profiles
Plaster thickness	10 mm
Material	Rigid PVC with soft PVC
Product length	150 cm; 230 cm; 260 cm
Product width	10 mm
Air and component temperature	+5° bis +40°C
Productcolor	10, white
Appearance	Self-adhesive, closed-cell foam tape.
Underground	Bonding areas must be even, dry (note possible condensation), free of frost, dust, grease, solid and load-bearing. An adhesive test indicates whether the substrate is suitable for bonding or whether special measures (e.g. cleaning) are required.
Treatment	Maximum installation length of 260 cm due to possible linear expansion. For underground with lightness value greater than 20.
Packaging Unit	60 PCS / 36 BOX
Storage	Store profiles dry, frost-free, horizontally and flat in the box. Do not store or transport profiles which are twisted or bent. Protect cartons and/or profiles from excessive heat and direct sunlight. To remove the profiles, open the carton over its entire length.
Impermeability to driving rain	bis 1050 Pa
Movement according to ÖNORM B6400/ÖAP VAR VII	Klasse IC
Movement according to VDPM leaflet/SAF guideline	Klasse C
product line	Standard

PRODUCT DATA SHEET

Frameseal bead with protecting lip

10 mm

Item no. 3712



Test report	Geprüfte Luft-, Wind- und Schlagregendichtheit, geprüfte Bewegungsaufnahme. Die jeweils aktuellen Prüfberichte stehen auf www.protektor.de zum Download bereit.
Leaflet	* Leaflet * Fiche technique Formation de détails avec des profilés et des bandes d'étanchéité de joints pour l'enduit extérieur et l'ETICS, éditeur Verband für Dämmsysteme, Putz und Mörtel e.V. (VDPM). * Guideline for connections to windows and shutters in plaster, thermal insulation composite system and dry construction, published by the Baden-Württemberg Association of Plasterers for Interiors and Facades (SAF).
connection joint	Protective lip

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!