

PRODUCT DATA SHEET



Frameseal bead with flexible element, protecting lip

9 mm

Item no. 3726



Status: 04.02.2025 | 11:02

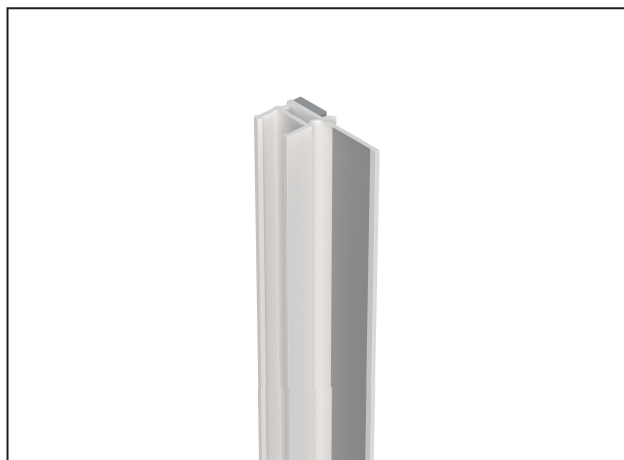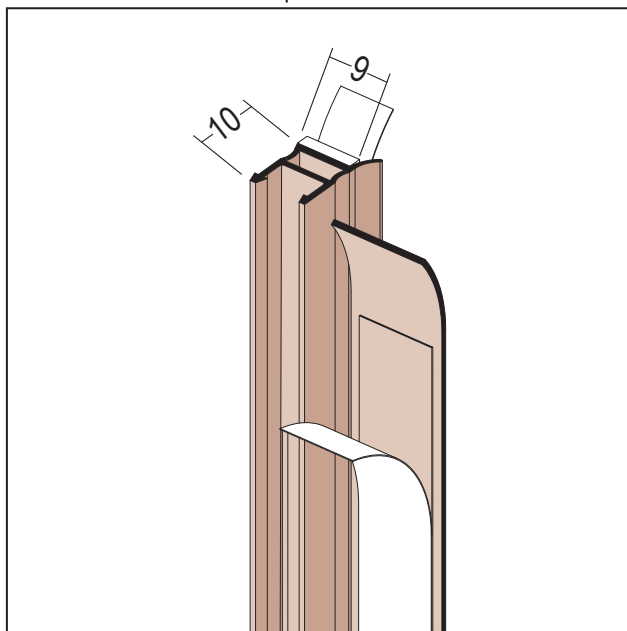

Designation	Frameseal bead with flexible element, protecting lip 9 mm
Description	Self-adhesive, white PVC window frame sealing bead with a profile width of 9 mm, for interior and exterior plasters, including protective lip and detachable adhesive tab for coverage foil. Additional movement chamber for increased movement absorption. Test-certified resistance to air, wind and heavy rain. Creates visually and technically perfect soffit connections. Window frame sealing beads cannot be extended by striking. Can be applied to substrates with a lightness coefficient ≥ 20.
Product area	Internal plastering External rendering
Product category	Soffit profiles
Plaster thickness	9 mm
Material	Rigid PVC with soft PVC
Product length	150 cm; 230 cm; 260 cm
Product width	9 mm
Air and component temperature	+5° bis +40°C
Productcolor	10, white
Appearance	Self-adhesive, closed-cell foam tape.
Underground	Klebebereiche müssen eben, trocken (mögliches Kondensat beachten), frost-, staub-, fettfrei, fest und tragfähig sein. Eine Klebprobe sagt aus, ob der Untergrund klebegeeignet ist bzw. ob gesonderte Maßnahmen (z.B. Reinigen) erforderlich sind.
Treatment	Maximum installation length of 260 cm due to possible linear expansion. For underground with lightness value greater than 20.
Packaging Unit	50 PCS / 36 BOX
Storage	Profile trocken, frostfrei, waagrecht und flachliegend im Karton lagern. Profile nicht verdreht bzw. gebogen lagern oder transportieren. Kartons und/oder Profile vor übermäßiger Wärmeeinwirkung und direkter Sonnenbestrahlung schützen. Zur Entnahme der Profile Karton über die gesamte Länge öffnen.
Impermeability to driving rain	bis 1050 Pa
Movement according to VDPM leaflet/SAF guideline	Klasse C
product line	Standard

PRODUCT DATA SHEET

Frameseal bead with flexible element, protecting lip

9 mm

Item no. 3726



Test report	Geprüfte Luft-, Wind- und Schlagregendichtheit. Die jeweils aktuellen Prüfberichte stehen auf www.protektor.de zum Download bereit.
Leaflet	* Leaflet * Fiche technique Formation de détails avec des profilés et des bandes d'étanchéité de joints pour l'enduit extérieur et l'ETICS, éditeur Verband für Dämmsysteme, Putz und Mörtel e.V. (VDPM). * Guideline for connections to windows and shutters in plaster, thermal insulation composite system and dry construction, published by the Baden-Württemberg Association of Plasterers for Interiors and Facades (SAF).
connection joint	Protective lip

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!