



# PRODUCT DATA SHEET

Expansion joint profile for dry lining  
to smooth  
Item no. 3750

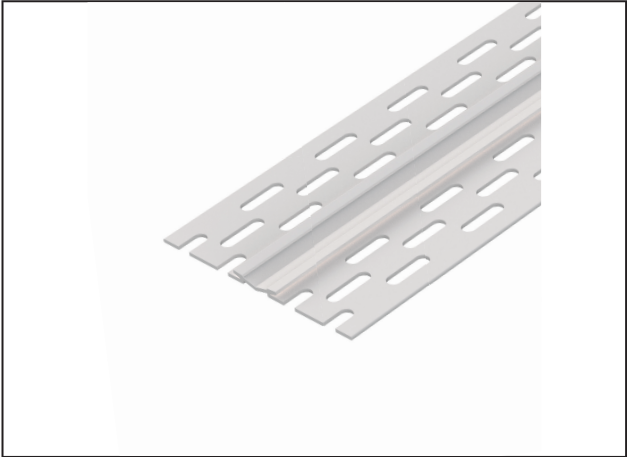

Status: 17.12.2024 | 11:12

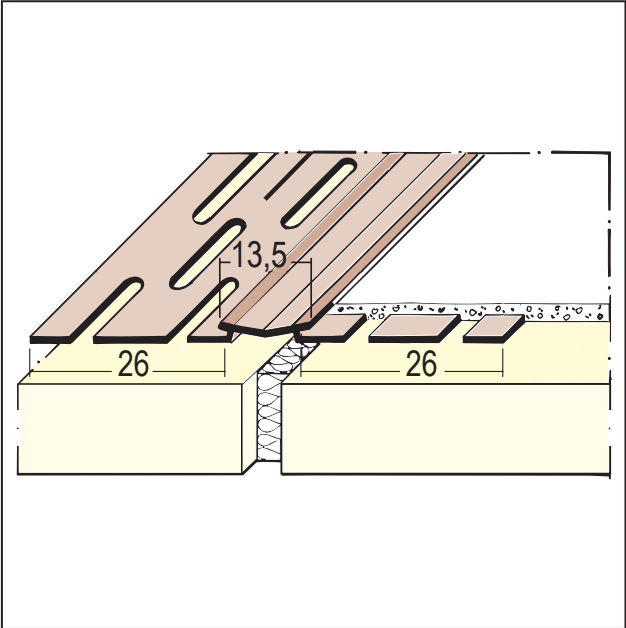

|                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Designation                    | Expansion joint profile for dry lining to smooth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Description                    | <p>White PVC movement joint profile with flexible PVC centre for producing movement joints in walls or ceilings according to the requirements of DIN 18181.</p> <p>Ideally suited for installation on surfaces as well as inside corners. Apply plaster to the entire surface on both sides of the profile up to the flexible PVC centre and secure with clips.</p> <p>Be aware of noise and fire protection requirements.</p> <p>IMPORTANT! PVC central piece offers limited possibilities for applying suitable coatings. Approval is required from the coating material manufacturer.</p> |
| Product area                   | Internal construction                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Product category               | Filler profiles                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Plaster thickness              | 1 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Material                       | Rigid PVC with soft PVC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| GK/Plate                       | ab 8 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Product length                 | 7,500 cm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|                                | 13 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Revision                       | <p>IMPORTANT! PVC central piece offers limited possibilities for applying suitable coatings. Approval is required from the coating material manufacturer.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Motion recording train / print | +/-1,5 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Productcolor                   | 10, white                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Treatment                      | All profiles must also be fastened with clips.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Packaging Unit                 | 1 ROL / 120 BOX                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!