

# PRODUCT DATA SHEET



Frameseal bead with protecting lip, mesh

9 mm

Item no. 37909



Status: 02.08.2026 | 04:41

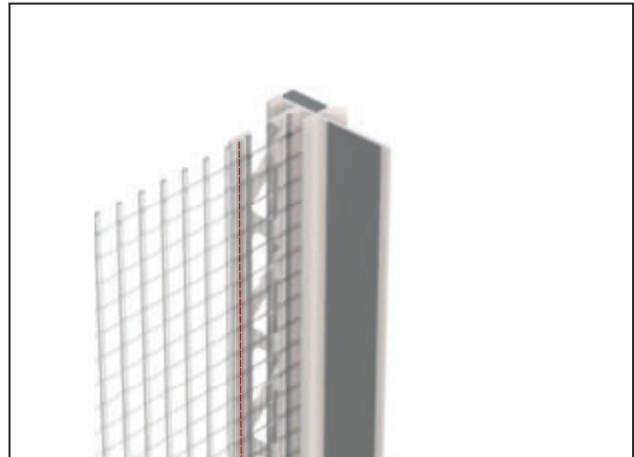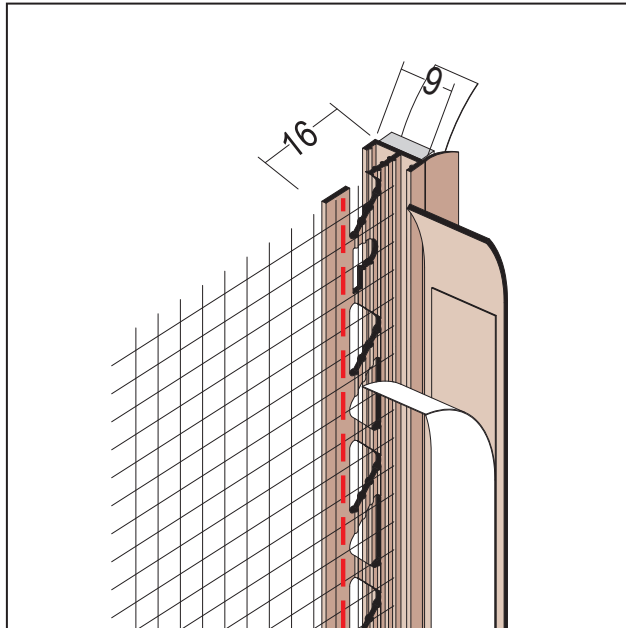

|                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Designation</b>                   | Frameseal bead with protecting lip, mesh 9 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>                   | The self-adhesive PROTEKTOR PVC frame seal bead with sewn-on alkali-resistant glass fibre mesh, protective lip and tear-off adhesive tab for foil covering is suitable for creating visually and technically flawless connections between windows, doors and other components and plaster and ETICS systems. With perforated plastering leg and sewn-on mesh for high-strength plaster integration. Profile width 9 mm for ETICS systems with plaster thicknesses from 6 mm and plaster from 9 mm.                                                                                                                                                                                                                                                                                                                       |
| <b>Product area</b>                  | Thermal insulation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Product category</b>              | Soffit profiles                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Plaster thickness</b>             | 9 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Product width</b>                 | 9 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Air and component temperature</b> | +5° bis +40°C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Grammage</b>                      | 160 g/m <sup>2</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|                                      | 3 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|                                      | 8 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Mesh size</b>                     | 4 x 4 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Appearance</b>                    | The foam tape is self-adhesive and closed-cell.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Underground</b>                   | Bonding areas must be even, dry (note possible condensation), free of frost, dust, grease, solid and load-bearing. An adhesive test indicates whether the substrate is suitable for bonding or whether special measures (e.g. cleaning) are required.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Treatment</b>                     | Pull off the cover strip of the foam tape approx. 10 -15 cm, then place the profile in the desired position, then gradually fix the cover strip on the rear-side of the profile by pressing it on. Back profile joints with pre-compressed joint sealing tape and arrange only in the upper third of the soffit. Piecing up of the strips is not permitted. Existing plaster legs must be completely backfilled and covered. Air pockets and cavities behind the profiles are not permitted and reduce the force-fit embedding. Do not plaster or paint over the visible PVC bar. Maximum window height 4,0 m (with single bar length 3,0 m). Can be used on substrates with a luminosity value bigger than 7. Please observe the PROTEKTOR selection criteria, processing information and installation recommendations. |
| <b>Overplastering Ability</b>        | Test-certified resistance to air, wind and heavy rain                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Storage</b>                       | Store profiles dry, frost-free, horizontally and flat in the box. Do not store or transport profiles which are twisted or bent. Protect cartons and/or profiles from excessive heat and direct sunlight. To remove the profiles, open the carton over its entire length.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

# PRODUCT DATA SHEET

Frameseal bead with protecting lip, mesh

9 mm

Item no. 37909



|                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Impermeability to driving rain</b>                   | bis 1050 Pa                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Annotation</b>                                       | Test-certified resistance to air, wind and heavy rain                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Movement according to ÖNORM B6400/ÖAP VAR VII</b>    | Klasse IC                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Movement according to VDPM leaflet/SAF guideline</b> | Class C                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>product line</b>                                     | BasicLine                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Leaflet</b>                                          | * Leaflet * Fiche technique Formation de détails avec des profilés et des bandes d'étanchéité de joints pour l'enduit extérieur et l'ETICS, éditeur Verband für Dämmsysteme, Putz und Mörtel e.V. (VDPM).<br>* Guideline for connections to windows and shutters in plaster, thermal insulation composite system and dry construction, published by the Baden-Württemberg Association of Plasterers for Interiors and Facades (SAF). |
| <b>Airtightness</b>                                     | up to 600 Pa                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Customs tariff number</b>                            | 39269097                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Opened label</b>                                     | Purchase only possible as full packaging units.                                                                                                                                                                                                                                                                                                                                                                                      |

| Item number | Length (cm) | Plaster thickness | Material                                     | Colour     | Packaging unit  |
|-------------|-------------|-------------------|----------------------------------------------|------------|-----------------|
| 110869      | 260.00      | 9 mm              | Rigid PVC with soft PVC and glass fibre mesh | 10 - white | 50 PCS / 13 BOX |
| 111923      | 300.00      | 9 mm              | Rigid PVC with soft PVC and glass fibre mesh | 10 - white | 50 PCS / 13 BOX |
| 112162      | 300.00      | 9 mm              | Rigid PVC with soft PVC and glass fibre mesh | BD - brown | 50 PCS / 13 BOX |

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!