

PRODUCT DATA SHEET



Wire corner bead for interior and exterior plaster (APP)

15 mm

Item no. 11572



Status: 02.08.2026 | 21:04

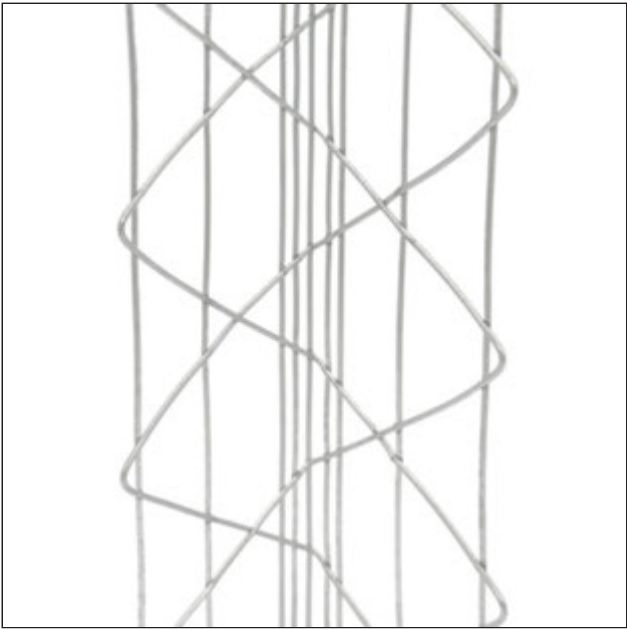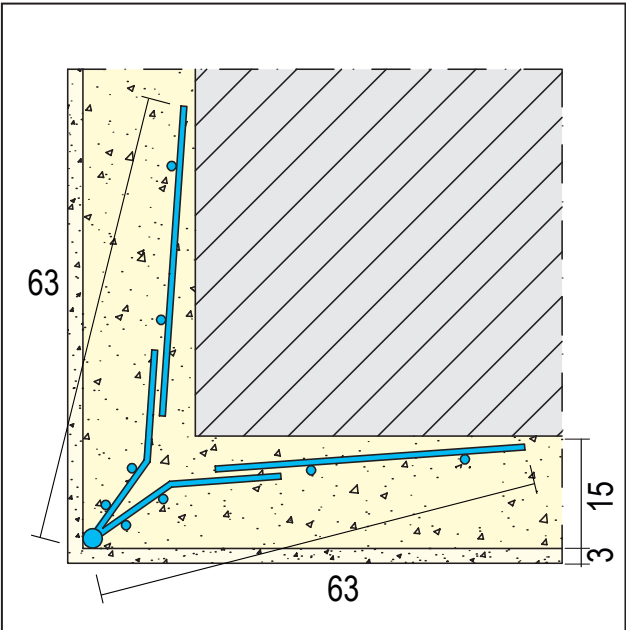

Designation	Wire corner bead for interior and exterior plaster (APP) 15 mm
Description	Windra® APP wire corner bead made of galvanised steel with a white polyester coating (duplex coating) for additional corrosion protection, for interior plaster and exterior plaster from 15 mm. Particularly suitable for coarse base coats or special requirements for plaster adhesion.
Product area	Interior plaster Exterior plaster
Product category	Corner profiles
Plaster thickness	15 mm
Standard EN	EN 13658-2
Galvanizing	200 g/m²
Leg length	63 x 63 mm
Reaction to fire (R2F)	A1
Customs tariff number	73262000
Processing instructions	When using galvanised profiles with coating, a covering at least equal to the thickness of the mortar slurry is necessary. A covering equal to the grain thickness should be aimed for.
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Colour	Packaging unit
142980	260.00	15 mm	Galvanised steel, with white basic coating		40 PCS / 40 BOX
142942	295.00	15 mm	Galvanised steel, with white basic coating	10 - white	40 PCS / 40 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!