

# PRODUCT DATA SHEET



Wired corner bead for interior and exterior plaster (APB)

15 mm

Item no. 11582



Status: 18.04.2026 | 01:35

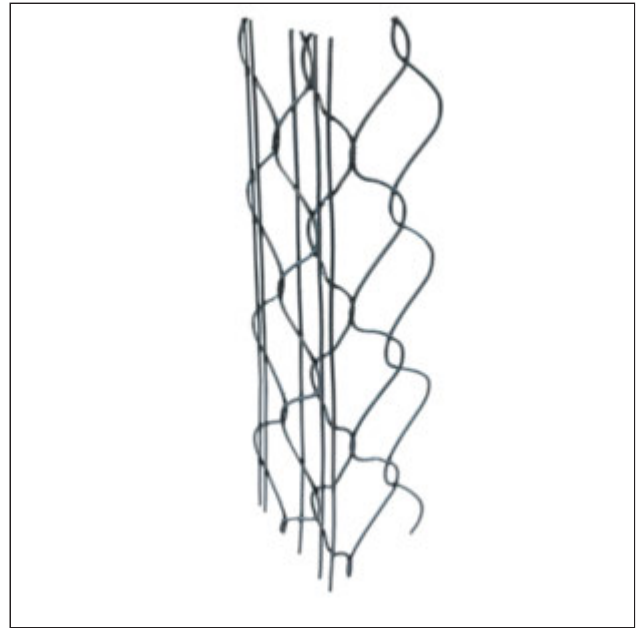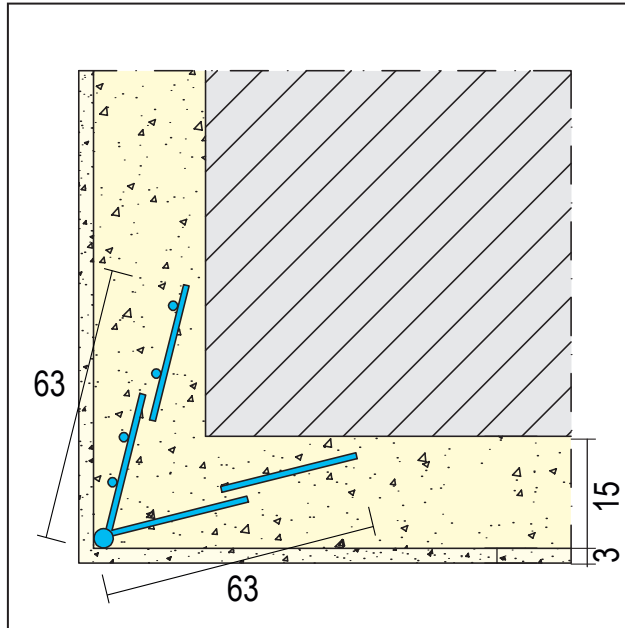

|                                |                                                                                                                                                                                                                                                                |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Designation</b>             | Wired corner bead for interior and exterior plaster (APB) 15 mm                                                                                                                                                                                                |
| <b>Description</b>             | Windra® APB wire corner bead made of galvanised steel, without longitudinal wires on one side, for curved constructions in interior and exterior plaster from 15 mm. Particularly suitable for coarse base coats or special requirements for plaster adhesion. |
| <b>Product area</b>            | Internal plastering   External rendering                                                                                                                                                                                                                       |
| <b>Product category</b>        | Corner profiles                                                                                                                                                                                                                                                |
| <b>Plaster thickness</b>       | 15 mm                                                                                                                                                                                                                                                          |
| <b>Standard EN</b>             | EN 13658-2                                                                                                                                                                                                                                                     |
| <b>Galvanizing</b>             | 200 g/m <sup>2</sup>                                                                                                                                                                                                                                           |
| <b>Leg length</b>              | 63 x 63 mm                                                                                                                                                                                                                                                     |
| <b>Application Areas</b>       | Particularly suitable for arched structures.                                                                                                                                                                                                                   |
| <b>Reaction to fire (R2F)</b>  | A1                                                                                                                                                                                                                                                             |
| <b>Customs tariff number</b>   | 73262000                                                                                                                                                                                                                                                       |
| <b>Processing instructions</b> | Galvanised profile edges in outdoor areas must be covered with at least 3 mm of mineral finishing plaster.                                                                                                                                                     |
| <b>Opened label</b>            | Purchase only possible as full packaging units.                                                                                                                                                                                                                |

| Item number | Length (cm) | Plaster thickness | Material         | Packaging unit  |
|-------------|-------------|-------------------|------------------|-----------------|
| 142943      | 295         | 15 mm             | Galvanised steel | 40 PCS / 20 BOX |

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!