

PRODUCT DATA SHEET



Dimpled sheet profile

14 mm

Item no. 2768



Status: 05.12.2024 | 01:12

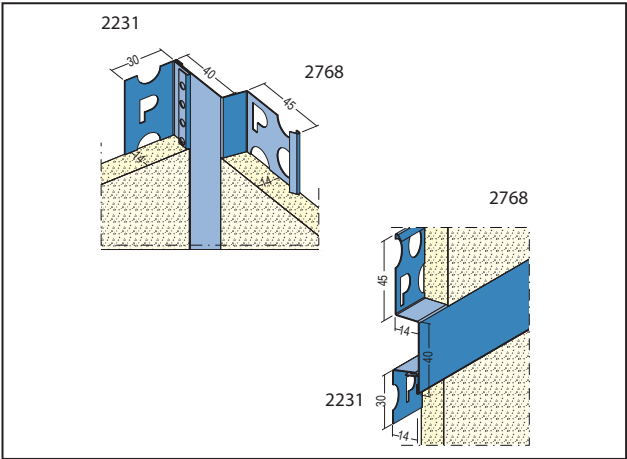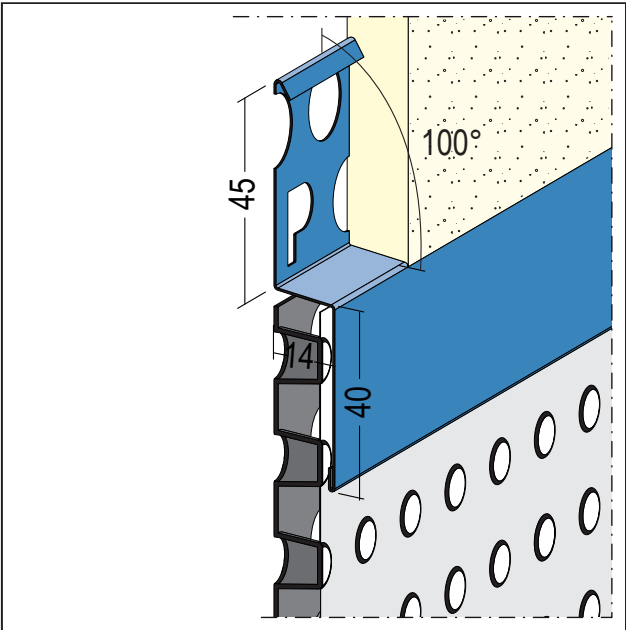

Designation	Dimpled sheet profile 14 mm
Description	PROTEKTOR-Convuluted sheet/overhang profile made of stainless steel for interior and exterior plastering from 14 mm. For the horizontal transition from the protective layer (dimpled membrane, drainage mat, etc.) to the base area. Also suitable for vertical and horizontal use as an expansion joint/overhang profile.
Product area	Internal plastering External rendering
Product category	Joint profiles Connecting profiles
Types of mortar	Silicate plaster, Reinforcing plaster organ, Insulating plaster, Deposits cleaning, Gypsum mortars and mortars containing gypsum, Gypsum plaster, Lime plaster, Lime cement plaster, Clay plaster, Restoration plaster
Plaster thickness	14 mm
Material	Stainless steel
Material thickness	0,5 mm
Standard EN	EN 13658-2
Product length	250 cm
Angular Position	100
Motion recording train / print	+/-10 mm
Application Areas	Dimpled sheet profile for the transition from drainage mat or dimpled sheet to wall-base plaster area.
Reaction to fire (R2F)	A1
Treatment	During the montage, the visible surface of the dimpled sheet must be protected from dirt and damage. The profile must be adjusted at the ground level and fixed with lumps of placement plaster. Kepp a space of 1-2 mm at the profile joints. The sealing in the area of the joints to the profile extension or at inner and / or outer corners must be carried out on site using suitable sealing material below the profile joints. The dimpled sheet profile should filled to the upper profile edge with fine gravel.
Packaging Unit	10 PCS / 100 BUN

PRODUCT DATA SHEET

Dimpled sheet profile

14 mm

Item no. 2768



Annotation

Powder coating in accordance with RAL specification available for an extra charge.
See data sheet for coated side.

Color coating of our stainless steel profiles on site is possible with suitable coatings. The technical specifications in the coating manufacturer's current data sheets must be observed and, if necessary, test areas must be created.

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!